


**SmartFade Console Series**

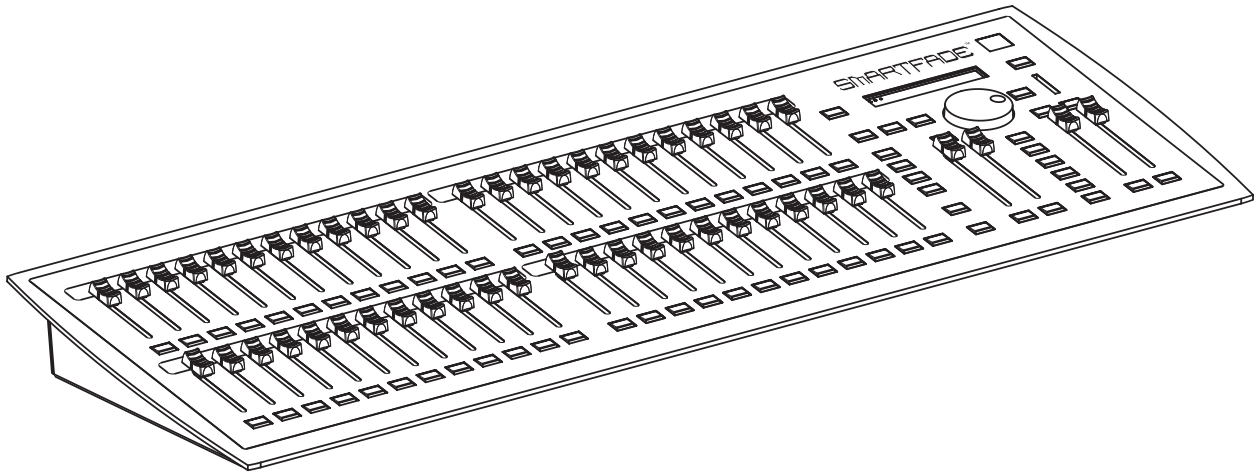

**GENERAL INFORMATION**

**SmartFade = Smart Control. A part of our Smart Solutions product suite.**

**SmartFade offers a great feature range including hands-on manual control, memory driven operation, and an impressive array of features for systems work. SmartFade is perfect for any venue from a small touring show to an auditorium control console to a stage manager's remote console.**

- APPLICATIONS**
- Touring productions
  - Middle/High School Auditoriums
  - College
  - Community Theatre
  - Small TV studio
  - Trade Show
  - Corporate

- FEATURES**
- Preset or Memory style operation
  - 24-Channel Two Preset Mode with timed fades
  - 96-Channel Normal Mode with 576 Memories
  - Fully programmable 99 step cue stack
  - 24-Step Sequences (chases) (48 available)
  - Tap tempo mode for sequence timing
  - Magic function for random output
  - 10 Snapshot memories for temporary storage
  - Undo function
  - Master fader and Blackout button
  - Bumps master fader
  - Solo or pile-on mode for bump buttons
  - DMX Backup Mode – 48 Memories x 512 Channels
  - LCD display for configuration and preview
  - Multiple consoles can be linked via MIDI to increase channel count
  - Available in free-standing or 19" rack mount configurations
  - DMX512 Output (1 universe of 512 channels)
  - DMX512 Input (1 universe of 512 channels)
  - MIDI in/out \*
  - USB interface to PC for software upgrades

\*MIDI support not available in initial software release. Contact ETC for availability.

**ORDERING INFORMATION**

**SmartFade**

Part No	Description
7219A1002-UK	SmartFade 2496 Console w. UK 13A psu
7219A1002-EU	SmartFade 2496 Console w. Europlug psu

**SmartFade Accessories**

Part No	Description
A128	SD Ram Card

**Other Consoles in the SmartFade Family**

Part No	Description
7219A1001-UK	SmartFade 1248 Console w. UK 13A psu
7219A1001-EU	SmartFade 1248 Console w. Europlug psu
7219A1096-UK	SmartFade 1296 Console w. UK 13A psu
7219A1096-EU	SmartFade 1296 Console w. Europlug psu




## SPECIFICATIONS

- MECHANICAL** 24 channels in 2 scene mode  
 96 channels in Normal mode  
 512 DMX Outputs  
 512 DMX Inputs  
 288 memories in Normal mode  
 Cross fader pair for cue stacks or sequences  
 Manual, Timed or Rate-Override playback in all modes  
 99 step cue stack  
 4 Sequence faders x 12 pages  
 24 step sequences  
 SD Card Slot for show backup  
 LCD Menu for configuration and preview  
 English, French, German and Spanish language support
- PLAYBACK CONTROLS**
- Channel Faders**  
 2 preset banks x 24 channels in Two Preset mode  
 48 channel faders x 2 banks in Normal mode for access to all 96 channels  
 Individual bump buttons on all channel faders with solo or pile-on operation
- Memory Faders**  
 48 memory faders x 12 pages in Normal mode for access to all 576 memories  
 Individual bump buttons on all memory faders with solo or pile-on operation
- Backup Faders**  
 48 memory faders in DMX Backup mode for access to DMX backup looks  
 Each memory can store 512 channels
- Crossfaders**  
 Crossfader pair for manual, timed or rate-override playback in all modes with Go, Pause, Rate and Clear buttons
- Master fader and Blackout button**
- Bumps fader**
- Independent channels (IND1 and IND2)**
- PROGRAMMING TOOLS**
- Snapshot storage**  
 Ten locations for temporary storage of memories
- Magic**  
 Magic function creates random levels and random chases.
- Editing**  
 Memories, cue stack and sequences can be edited  
 Cue stack and sequence steps can be inserted, moved and deleted individually
- INTERFACES**
- DMX512 Output  
 DMX 512 Input  
 USB  
 MIDI in/out \*


\*MIDI support not available in initial software release. Contact ETC for availability.

## SYSTEM APPLICATIONS


### DMX Console Applications

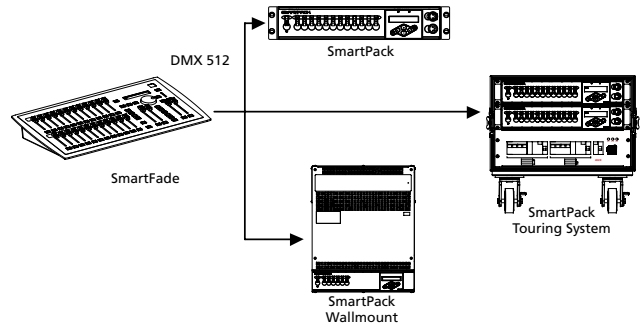

### Other System Applications

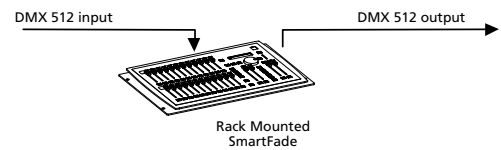

### DMX Backup Mode Application

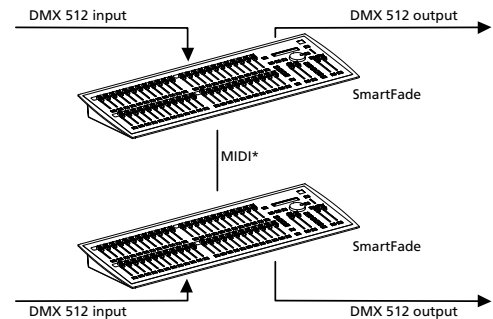

## PHYSICAL

### SmartFade Dimensions and Weight

Model	Height	Width	Depth	Weight
SmartFade 2496	64mm	686mm	254mm	4.5kg

Available from:



**Corporate Headquarters** ■ 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA ■ Tel +1 608 831 4116 ■ Fax +1 608 836 1736

**London, UK** ■ Unit 5, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000

**Rome, IT** ■ Via Ennio Quirino Visconti, 11, 00193 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +39 (06) 32 656 990

**Holzkirchen, DE** ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00

**Hong Kong** ■ Room 605-606, Tower III Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325

**Web** www.etcconnect.com ■ **Email** (Americas) mail@etcconnect.com ■ (UK) mail@etc europe.com ■ (DE) info@ttlicht.com ■ (Asia) mail@etcasia.com

Copyright©2005 ETC. All Rights Reserved. All product information and specifications subject to change. 7219L1003-GB Rev C 03/05