

GENERAL INFORMATION

Get smart – get moving! Moving light control comes to the Smart Solutions product suite. SmartFade ML offers professional moving light control in a compact, lightweight package. Direct access controls including colour-coded backlit elastomer keys and encoder or fader control of moving light parameters, memory driven operation and built-in effects make SmartFade ML perfect for small gigs, meetings, parties, and other events where conventional and moving lights are used.

APPLICATIONS

- One-Off events
- Corporate Events
- Touring Productions
- School Theaters
- Community Theaters
- Small TV Studios
- Trade Shows

FEATURES

- Memory style operation
- Up to 24 Devices (Moving Lights or Dimmer/Scrollers)
- Up to 48 Intensity Channels (multiple dimmers per channel)
- Encoders or fader controls for moving light parameters
- 24 Groups
- 24 x 3 Palettes (Focus, Colour Beam)
- 288 Memories (24 x 12 pages)
- 11 Shape Effects
- 11 Linear Effects
- Parameter “Fan”
- Hue/Saturation control of colour mixing
- Backlit colour-coded elastomer keys indicate current colour mix
- Fully programmable 199-step stack
- 24-step Sequences (12 x 12 pages)
- Tap tempo mode for sequence timing
- 10 Snapshot memories for temporary storage
- Undo function
- Master fader and Blackout button
- Bumps master fader
- Solo or pile-on mode for bump buttons
- 2 x LCD displays for configuration and programming

GENERAL INFORMATION

- Multiple control desks may be linked via MIDI
- DMX512A Outputs (2 full Universes)
- MIDI In
- MIDI Out
- USB interface to PC for connection with SmartSoft and for software upgrades (See page 2 for more information about SmartSoft!)

ORDERING INFORMATION

SmartFade ML

PART #	DESCRIPTION
7219A1401	SmartFade ML 24 moving light/48 intensity channel control desk w. ext. power supply

SmartFade Accessories

PART #	DESCRIPTION
A128	SD RAM Card
PS313-F	International Power Supply, replacement. Includes plugs for American/Japanese, Europlug 2-pin, UK13A 3-pin and Australian/Chinese 2-pin
7219A4014	Dust Cover for SmartFade 2496/SmartFade ML

Other control desks in the SmartFade Family

PART #	DESCRIPTION
7219A1001	SmartFade 1248, 48 channel control desk
7219A1296	SmartFade 1296, 96 channel control desk
7219A1002	SmartFade 2496, 96 channel control desk



SmartFade Console Series

SPECIFICATIONS

MECHANICAL

- 24 channel/parameter/memory faders
- 24 direct select keys with RGB LED backlights
- 3 rotary encoders for configuration, programming
- 2 2x20 LCD displays for configuration, programming
- 2 x DMX512A Outputs (5-pin XLR)
- MIDI In
- MIDI Out
- USB for connection to PC
- Crossfader pair with GO, PAUSE, GO BACK
- Master fader and Blackout key
- Bumps Master and SOLO key
- Kensington lock point for security

PLAYBACK CONTROLS

- 24 x 12 pages Memories
- 12 x 12 pages 24-step Sequences
- 199-step Stack
- Crossfader pair with GO, PAUSE, GO BACK
- Master fader and Blackout key
- Bumps Master and SOLO key
- Independent channels (IND1 and IND2)

PROGRAMMING TOOLS

- 24 x 2 pages parameter faders
- 3 rotary encoders
- 2 2x20 LCD displays
- 24 direct select keys for access to devices, groups, palettes and effects
- 24 Groups
- 24 x 3 Palettes (Focus, Colour, Beam)
- Parameter "Fan"
- 22 Effects (11 shape effects/11 linear effects)
- 10 Snapshot memories for temporary storage
- Memories, Stack and Sequences can be edited
- Sequence/Stack steps can be inserted, moved and deleted individually

INTERFACES

- DMX512A Output (Two XLR5 ports)
- USB
- MIDI In
- MIDI Out

AVAILABLE FROM



NOW WITH SMARTSOFT!

SmartSoft is an optional software application that runs on your PC and can be used to simulate the Smartfade ML control desk, edit offline and connect PC and desk via USB to provide live displays and on-screen editing functions for your show data. SmartSoft will run on a PC with Windows XP or Windows Vista and requires a video display with 1280x1024 resolution to display properly. SmartSoft is a free application for download from www.etcconnect.com.

PHYSICAL

SmartFade ML Dimensions*


MODEL	HEIGHT	WIDTH	DEPTH
	mm	mm	mm
SmartFade ML	64	686	254

SmartFade ML Weights*

MODEL	WEIGHT
	kgs
SmartFade ML	4.5

*Weights and dimensions typical

DMX Console Applications

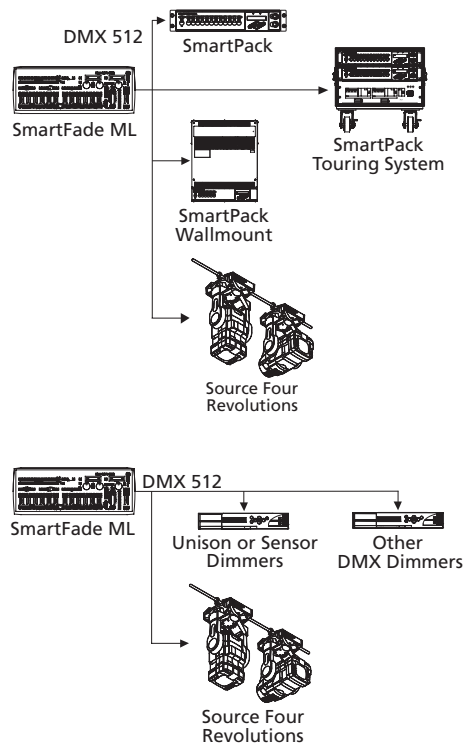

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736
London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000
Rome, IT • Via Ennio Quirino Visconti, 11, 00193 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +39 (06) 32 656 990
Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00
Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325
Web • www.etcconnect.com • Copyright©2008 ETC. All Rights Reserved. All product information and specifications subject to change. 7219L1006-GB Rev. B 02/08